

Common borders. Common solutions.

Earthquake, Landslide and Flood Disaster Prevention: the **SciNetNatHaz** project

Εντοπισμός περιοχών επιδεκτικών σε
πλημμύρες:

Οδηγός εφαρμογής σε περιφερειακή κλίμακα

K. Papatheodorou¹, E. Tzanou¹

Civil, Surveying & Geomatics Engineering dept, TEI of Central Macedonia, Greece

Ευχαριστίες:

Το Ερευνητικό Έργο **SciNetNatHaz** χρηματοδοτείται από πόρους της **ΕΥ** μέσω του Προγράμματος **Black Sea Basin Joint Operational Programme 2007-2013**
και από **Εθνικούς πόρους (ΕΣΠΑ)**


Common borders. Common solutions.

Περιεχόμενα

- Απαιτήσεις σε δεδομένα
- Διαδικασίες
- Προϊόντα
- Αξιολόγηση

Common borders. Common solutions.

Τα εργαλεία! – Δωρεάν Λογισμικό

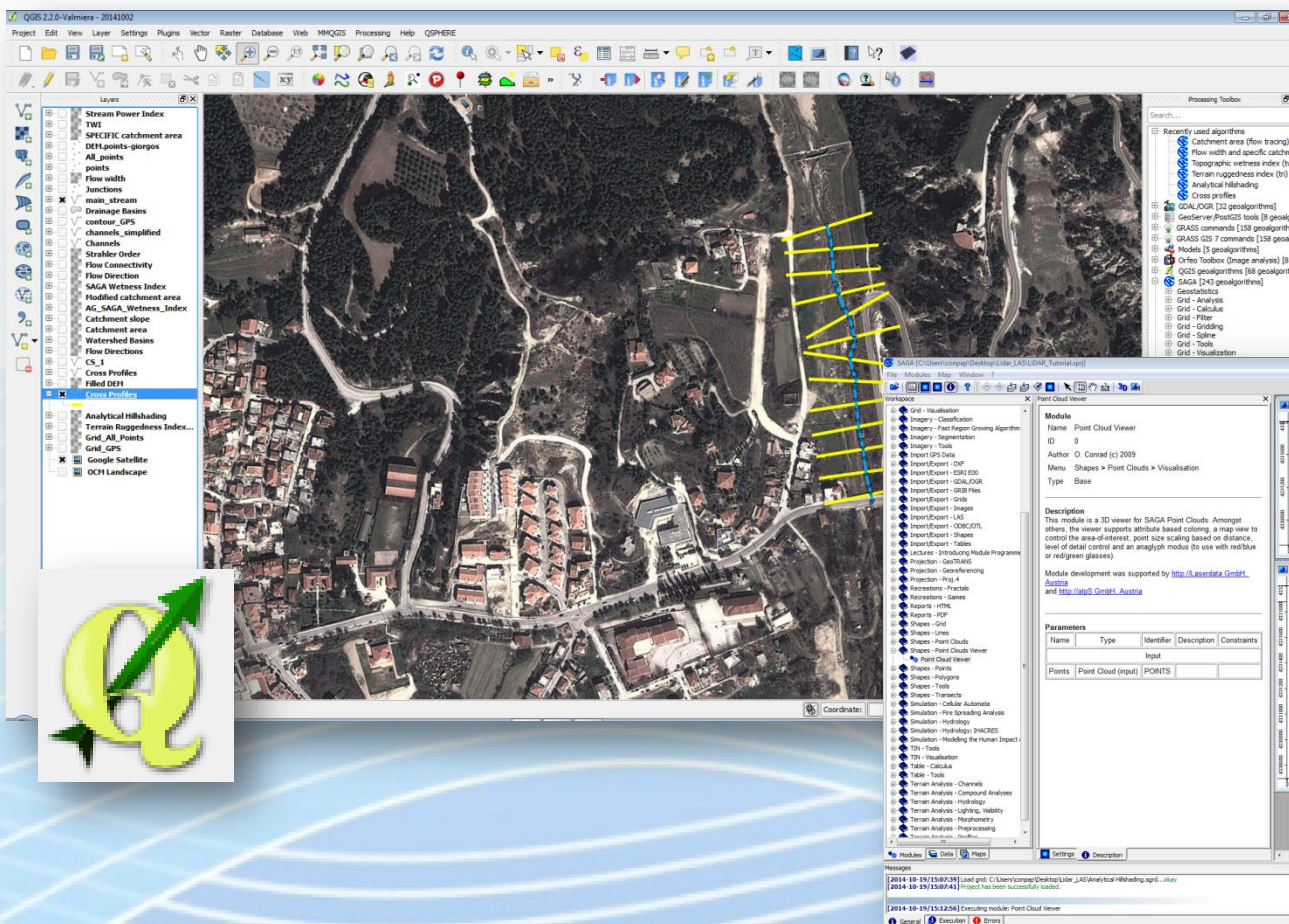

Common borders. Common solutions.

Δεδομένα


- Τοπογραφικά δεδομένα (ισοϋψείς και σημεία υψομέτρου), κλίμακας 1:50.000
- Χάρτες Καλύψεων γής (Corine 2000 / 2006)
- Οδικό δίκτυο

Common borders. Common solutions.


Τοπογραφικά δεδομένα και καλύψεις γής

Τριγωνομε-
τρικά


Ισοϋψείς /
20m

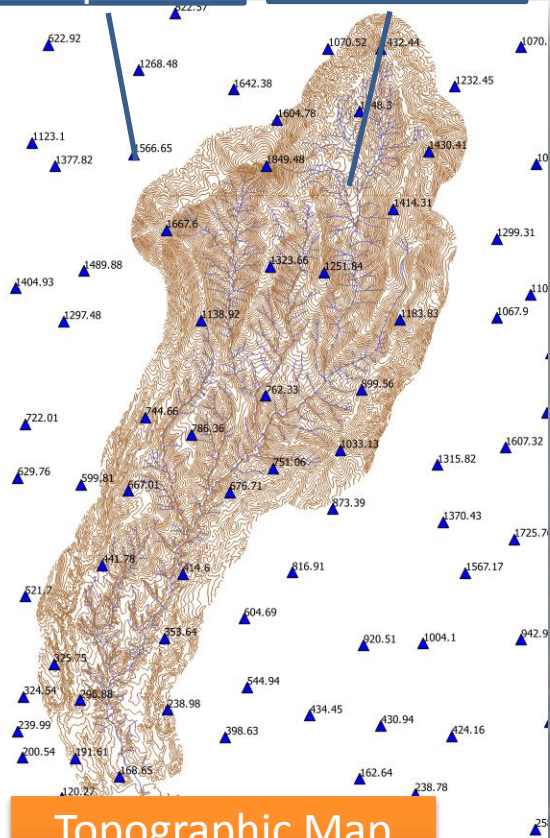

Topographic Map
1:50.000

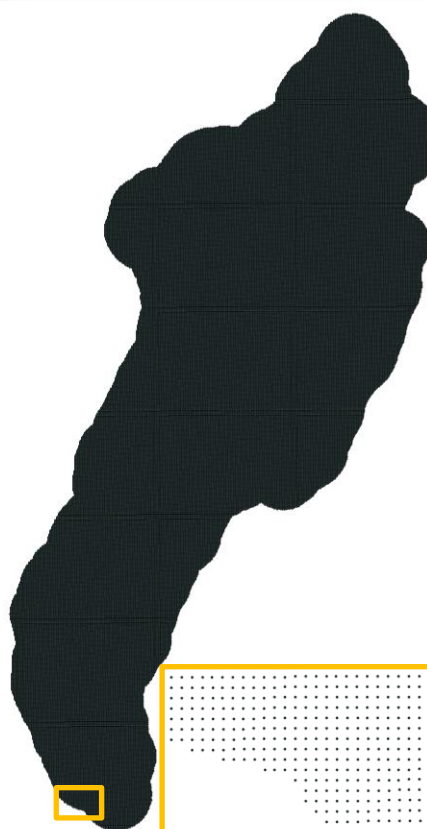


Lattice points /25m

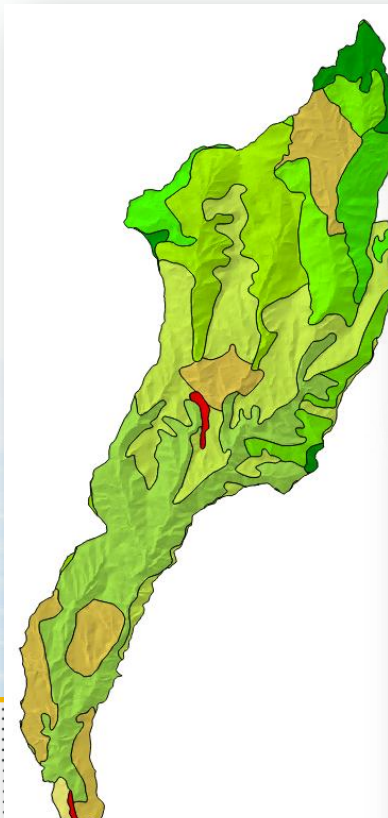

CORINE
Land Cover map

OpenStreet Maps
Public
Transportation

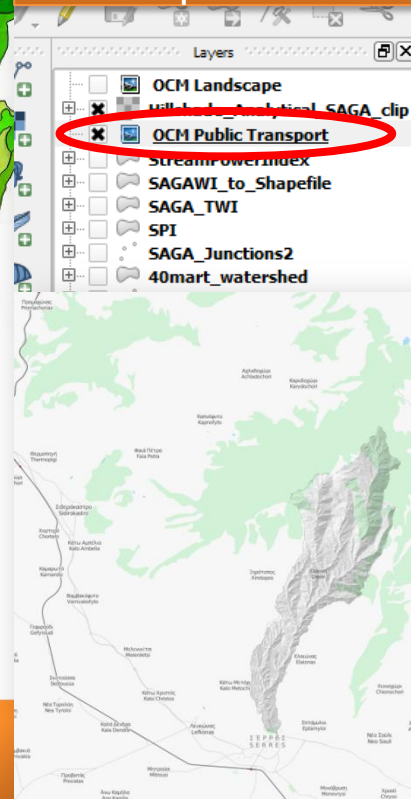


Common borders. Common solutions.


Meteorological
Stations

Data: Rainfall & Hydrology


Watershed

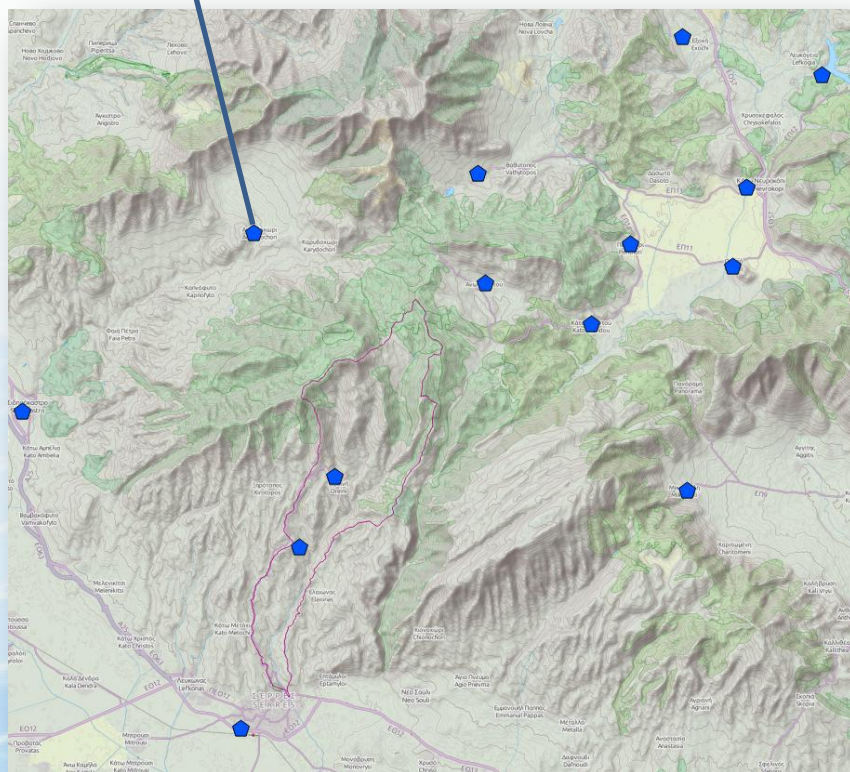

Meteo – Stations on an OpenStreet Map
Landscape layer

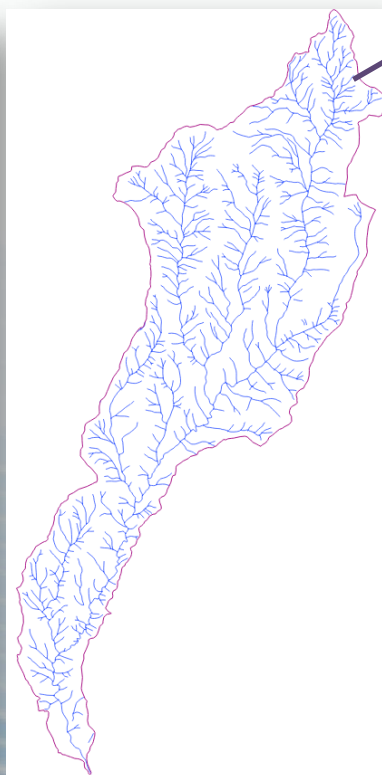


Hydrology Network
(digitized from topo maps)

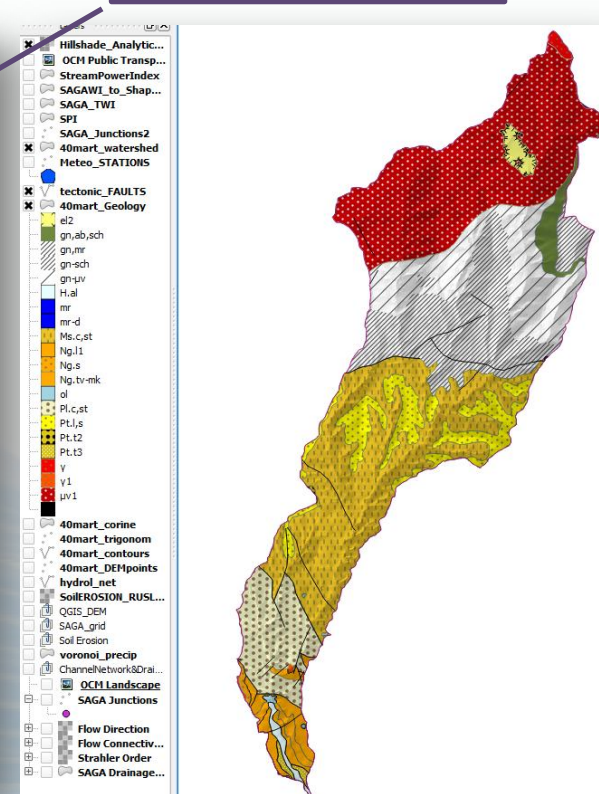

Geologic map


Common borders. Common solutions.

Διαδικασία – βήματα υπολογισμών

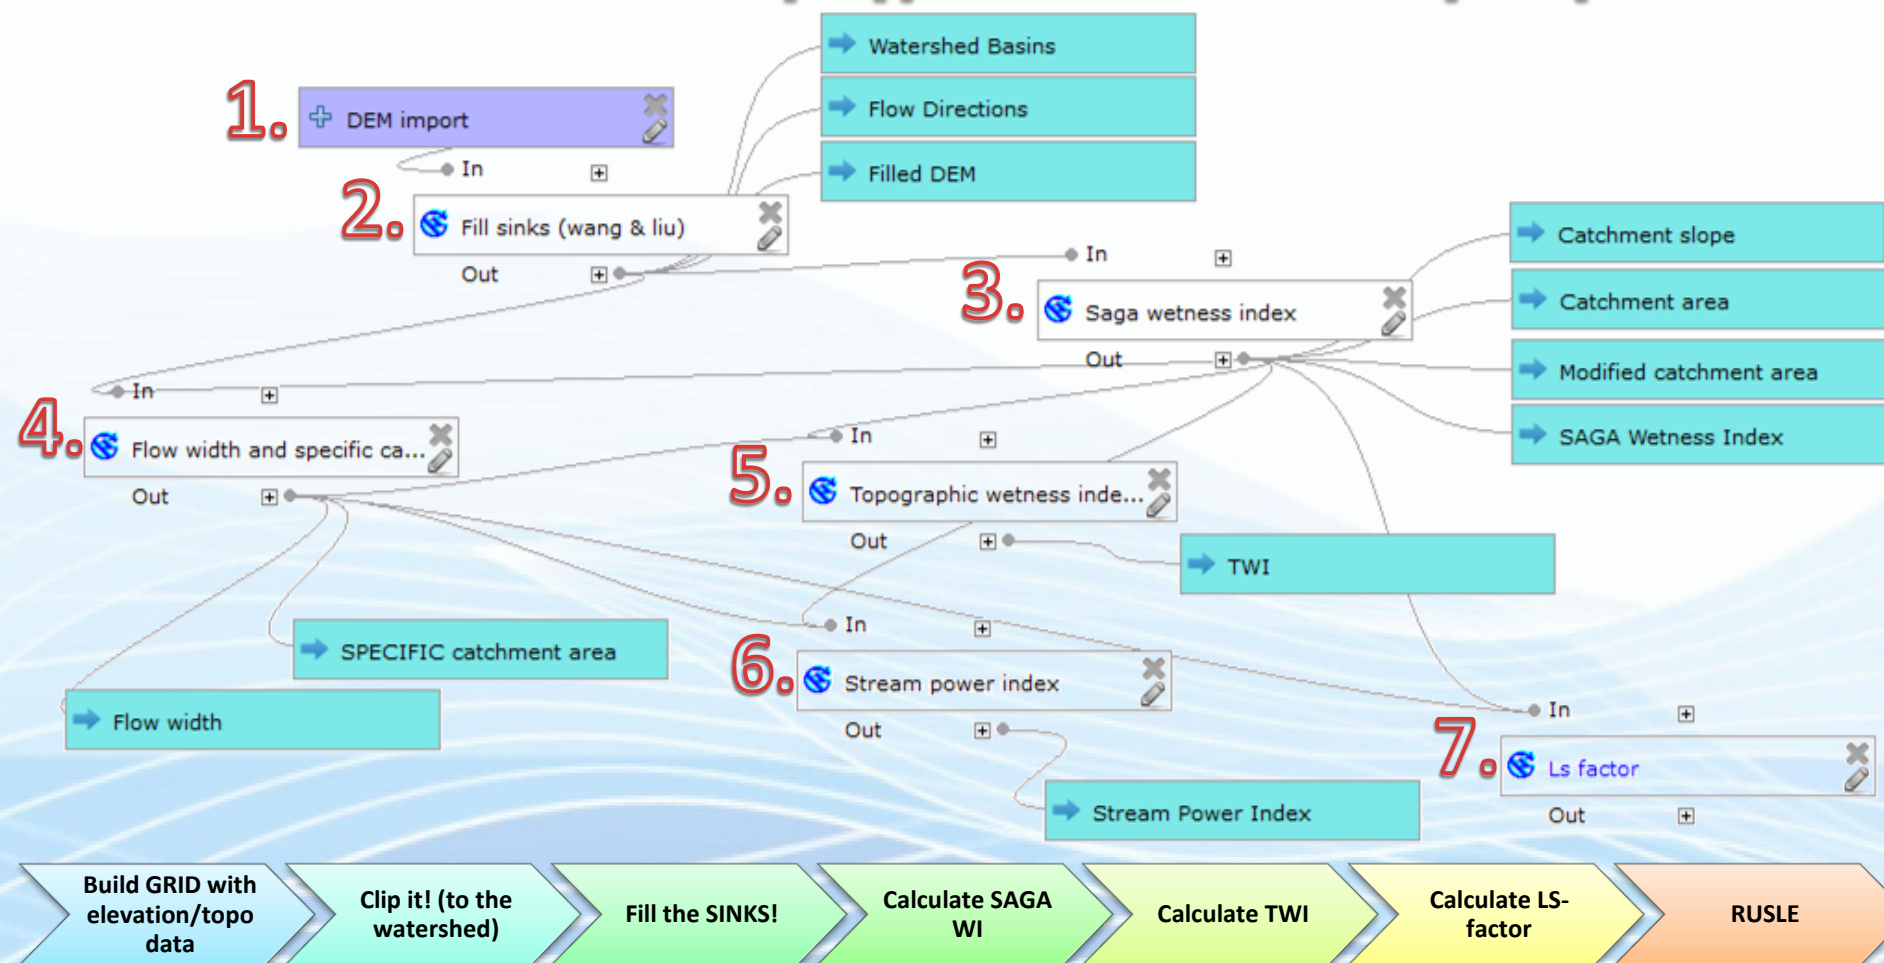

Common borders. Common solutions.

Διαδικασίες με GRIDs

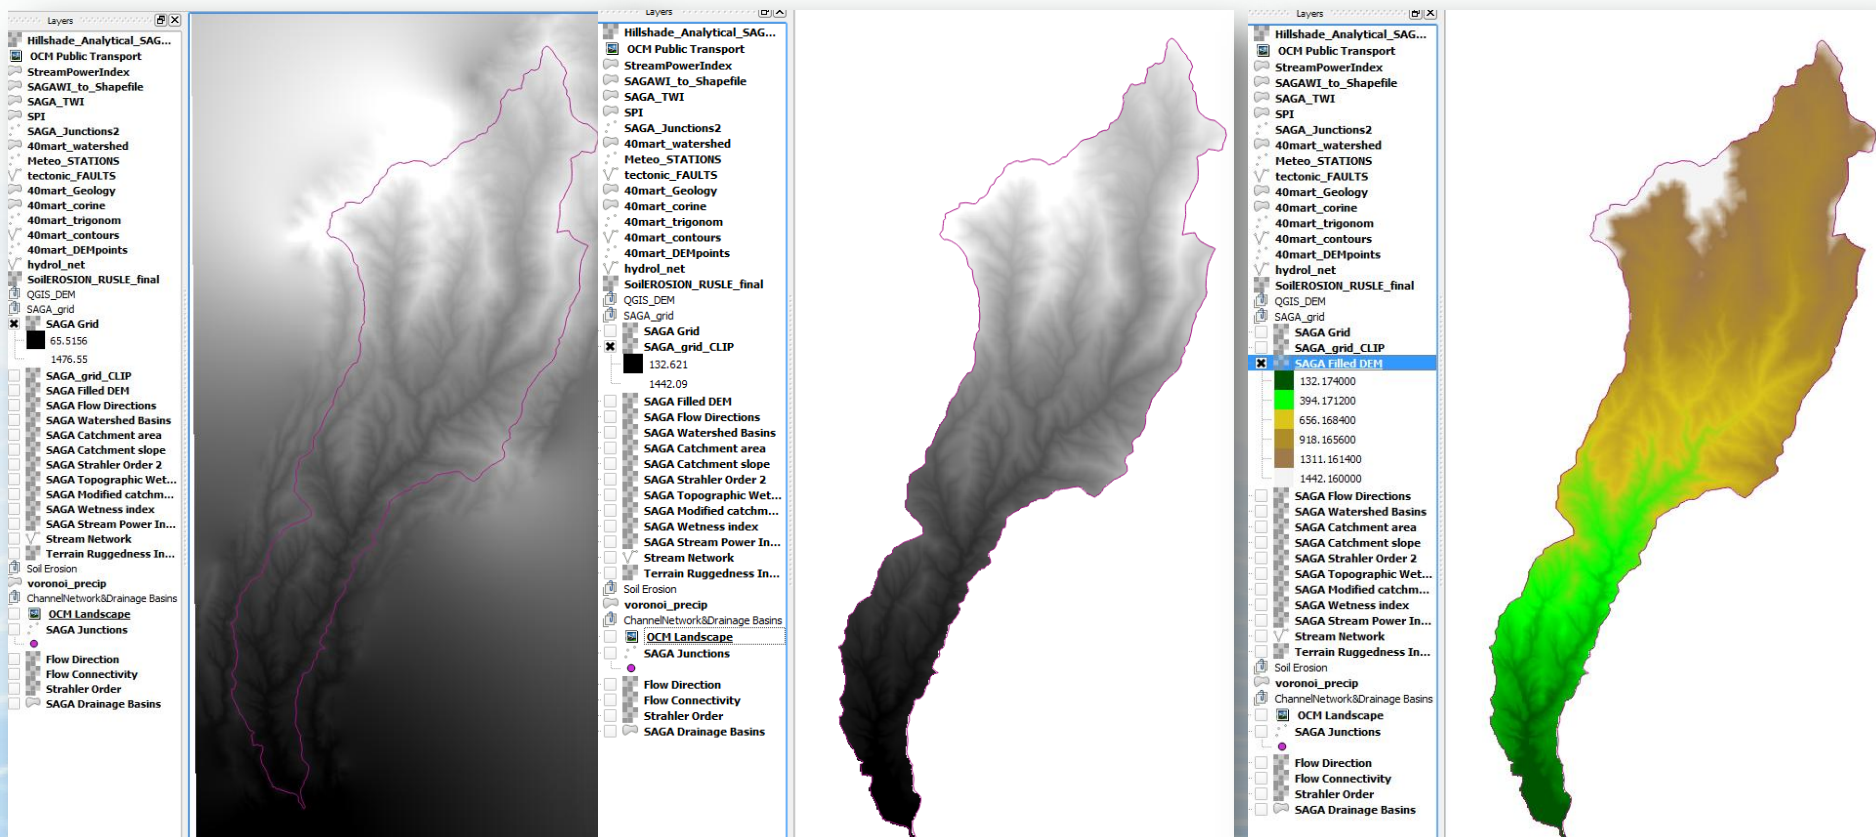

Build GRID with elevation/topo
data

Clip it! (to the watershed)

Fill the SINKS!

Common borders. Common solutions.


Προετοιμασία DEM– Fill Sinks

■ Περιγραφή

Χρησιμοποιείται αλγόριθμος (Wang & Liu, 2006) που ταυτοποιεί και καλύπτει έγκοιλα της επιφάνειας ώστε να διασφαλίζεται ομαλή απορροή στο ψηφιακό μοντέλο εδάφους. Η τροποποιημένη μέθοδος που χρησιμοποιείται, διασφαλίζει επιπλέον συνεχή-ελάχιστη κλίση προς τα κατόντη, προκειμένου να μην υπάρχουν εμπλοκές στην εφαρμογή του αλγόριθμου (από SAGA GIS)

■ Βιβλιογραφία

Wang, L. & H. Liu (2006): An efficient method for identifying and filling surface depressions in digital elevation models for hydrologic analysis and modeling. International Journal of Geographical Information Science, Vol. 20, No. 2: 193-213.

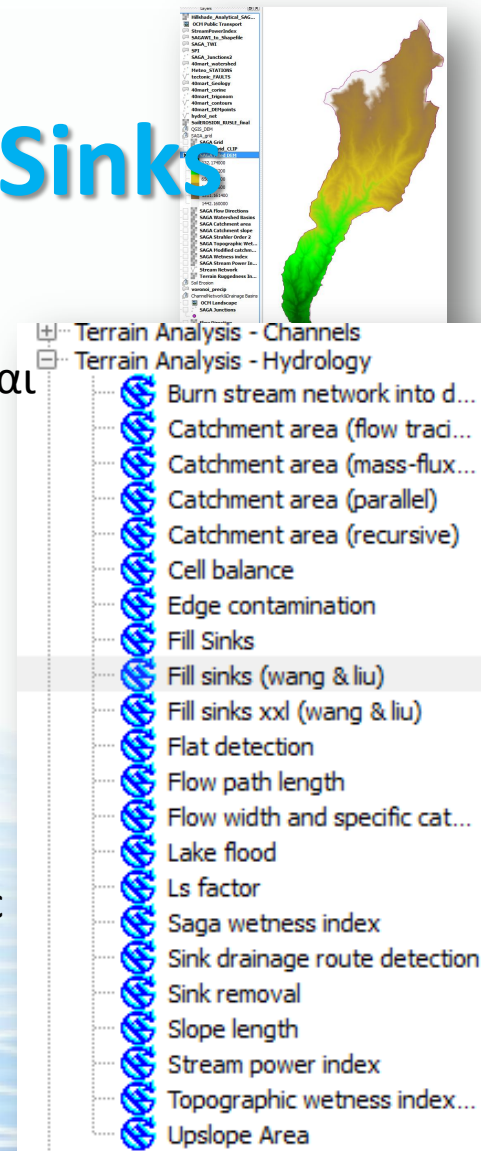

Common borders. Common solutions.

SAGA Wetness Index

SAGA Wetness Index

REFERENCES

Module

Name SAGA Wetness Index
ID 15
Author (c) 2001 by J.Boehner, O.Conrad
Menu Terrain Analysis > Hydrology > Topographic Indices
Type Grid

Description

The 'SAGA Wetness Index' is, as the name says, similar to the 'Topographic Wetness Index' (TWI), but it is based on a modified catchment area calculation ('Modified Catchment Area'), which does not think of the flow as very thin film. As result it predicts for cells situated in valley floors with a small vertical distance to a channel a more realistic, higher potential soil moisture compared to the standard TWI calculation.

References

- Boehner, J., Koethe, R. Conrad, O., Gross, J., Ringeler, A., Selige, T. (2002): Soil Regionalisation by Means of Terrain Analysis and Process Parameterisation. In: Micheli, E., Nachtergaele, F., Montanarella, L. [Ed.]: Soil Classification 2001. European Soil Bureau, Research Report No. 7, EUR 20398 EN, Luxembourg. pp.213-222.

Parameters

Name	Type	Identifier	Description	Constraints
Input				
Elevation	Grid (input)	DEM		
Output				
Catchment area	Grid (output)	C		
Catchment slope	Grid (output)	GN		
Modified catchment area	Grid (output)	CS		
Wetness index	Grid (output)	SB		
Options				
t	Floating point	T		Minimum: 0.000000

SAGA GIS

Common borders. Common solutions.

SAGA Wetness Index

Processing Toolbox

Saga wetness index

Parameters Log Help

Elevation
SAGA Filled DEM [EPSG:2100]

t
10

Catchment area
[Save to temporary file]

☒ Open output file after running algorithm

Catchment slope
[Save to temporary file]

☒ Open output file after running algorithm

Modified catchment area
[Save to temporary file]

☒ Open output file after running algorithm

Wetness index
[Save to temporary file]

☒ Open output file after running algorithm

0%

Run Close Cancel

Input FILLED DEM





The rest are created automatically

Outputs

- Hillshade_Analytical_S... Wetness index
6.99976
16.5441
- Modified catchment area
224.687
3.01162e+06
- Catchment slope
0
0.474734
- Catchment area
224.687
311789
- OCM Public Transport

Common borders. Common solutions.

SAGA Wetness Index – Ενδιάμεσα προϊόντα

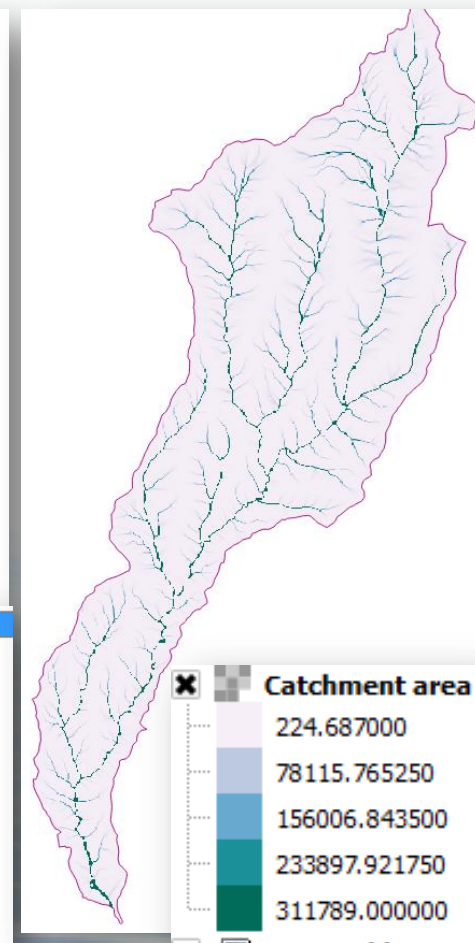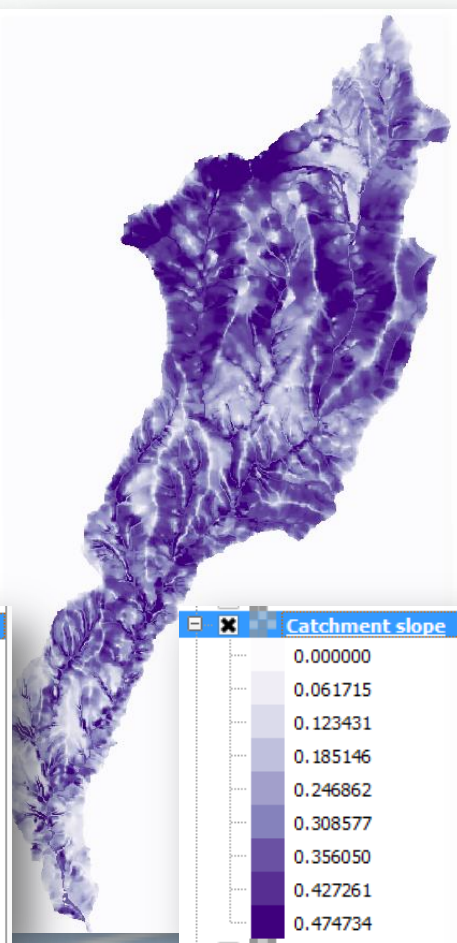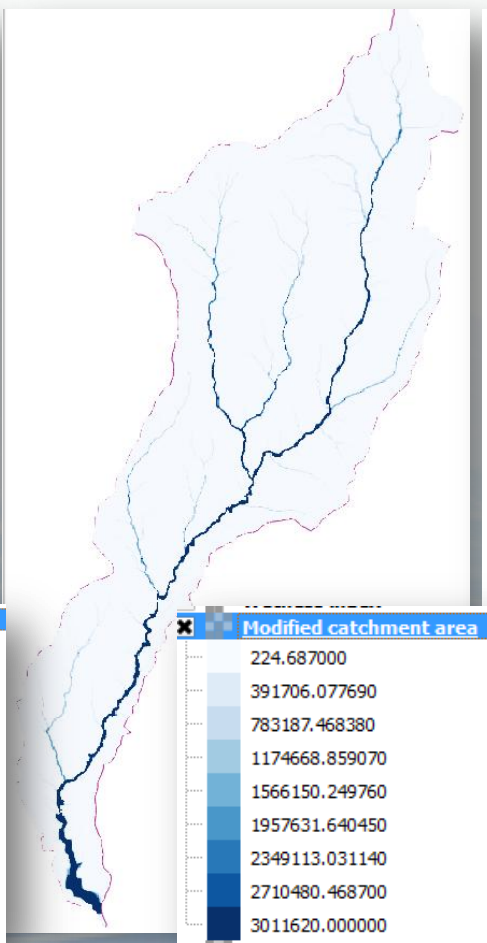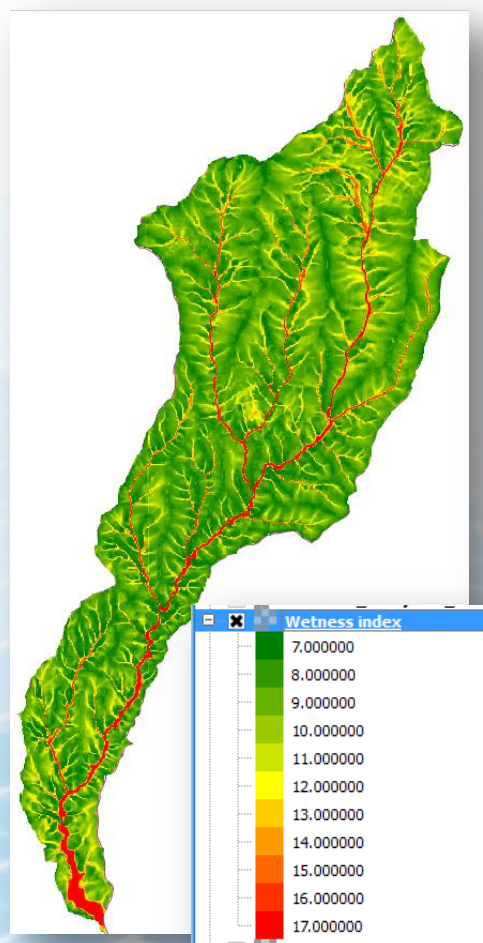

Common borders. Common solutions.

Flow Width & Specific Catchment Area*

REFERENCES

Flow Width and Specific Catchment Area

Module

Name Flow Width and Specific Catchment Area
ID 19
Author O. Conrad (c) 2009
Menu Terrain Analysis > Hydrology > Catchment Area
Type Grid

Description
Flow width and specific catchment area (SCA) calculation.

References:
Gruber, S., Peckham, S. (2008): Land-Surface Parameters and Objects in Hydrology. In: Hengl, T. and Reuter, H.I. [Eds.]: Geomorphometry: Concepts, Software, Applications. Developments in Soil Science, Elsevier, 33:293-308.
Quinn, P.F., Beven, K.J., Chevallier, P., Planchon, O. (1991): The prediction of hillslope flow paths for distributed hydrological modelling using digital terrain models. Hydrological Processes, 5:59-79

Parameters

Name	Type	Identifier	Description	Constraints
Input				
Elevation	Grid (input)	DEM		
Total Catchment Area (TCA) (*)	Grid (optional input)	TCA		
Output				
Flow Width	Grid (output)	WIDTH		
Specific Catchment Area (SCA) (*)	Grid (optional output)	SCA		
Options				
Method	Choice	Method	Available Choices	
			[0] Deterministic 8	
			[1] Multiple Flow Direction (Quinn et al. 1991)	
			[2] Aspect	

(*) optional

Flow width and specific catchment area

Parameters Log Help

Elevation
SAGA Filled DEM [EPSG:2100] ...

Total Catchment Area (TCA)
[Not selected] ...

Method
[0] Deterministic 8

Flow Width
[Save to temporary file] ...

☒ Open output file after running algorithm
Specific Catchment Area (SCA)
[Save to temporary file] ...

☒ Open output file after running algorithm

0%

Run Close Cancel

Terrain Analysis - Channels

☒ Terrain Analysis - Hydrology

- Burn stream network in...
- Catchment area (flow t...
- Catchment area (mass...
- Catchment area (parall...
- Catchment area (recur...
- Cell balance
- Edge contamination
- Fill Sinks
- Fill sinks (wang & liu)
- Fill sinks (wang & liu)
- Flow direction
- Flow path length
- Flow width and specific...
- Lake model
- Ls factor

SAGA GIS

* Απαραίτητη για τον υπολογισμό του TWI




Project funded by the
EUROPEAN UNION





Common borders. Common solutions.

Flow Width & Specific Catchment Area

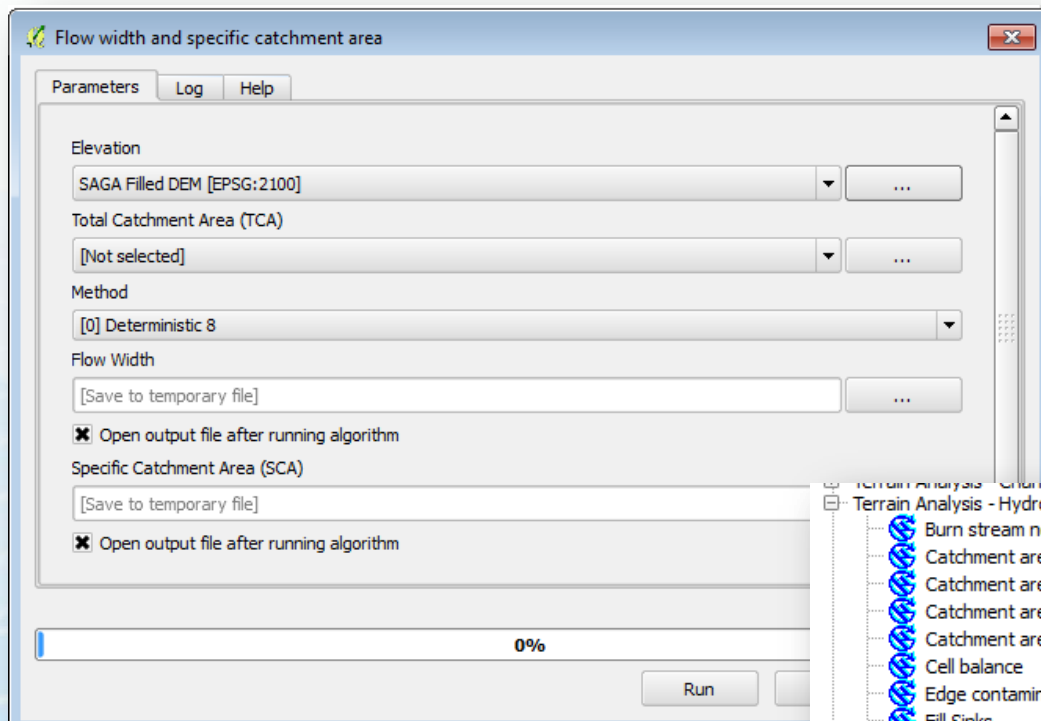

Menu/Location

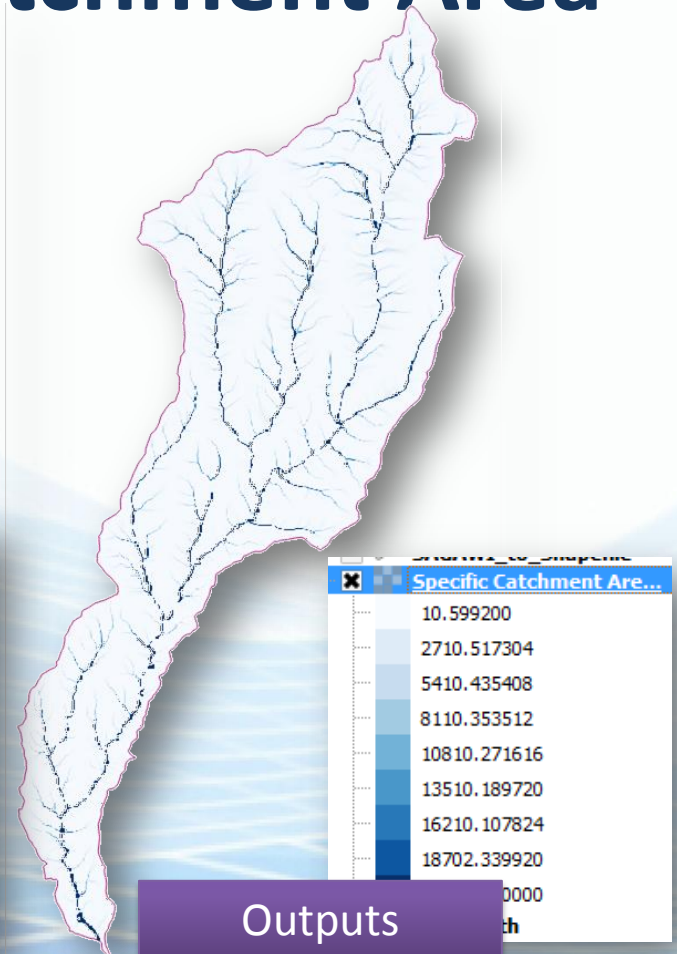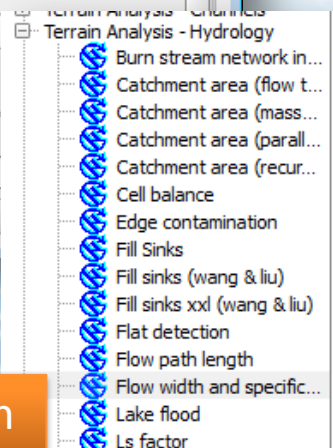

Outputs



Project funded by the
EUROPEAN UNION



Common borders. Common solutions.

Topographic Wetness Index (TWI)

Module

Name Topographic Wetness Index (TWI)
ID 20
Author O.Conrad (c) 2003
Menu Terrain Analysis > Hydrology > Topographic Indices
Type Grid

Description

Calculation of the slope and specific catchment area (SCA) based Topographic Wetness Index (TWI)

References:

Beven, K.J., Kirkby, M.J. (1979):
A physically-based variable contributing area model of basin hydrology/
Hydrology Science Bulletin 24(1), p.43-69


Boehner, J., Selige, T. (2006):
Spatial Prediction of Soil Attributes Using Terrain Analysis and Climate Regionalisation'
In: Boehner, J., McCloy, K.R., Strobl, J.: 'SAGA – Analysis and Modelling Applications', Goettinger Geographische Abhandlungen, Vol.115, p.13-27

Moore, I.D., Grayson, R.B., Ladson, A.R. (1991):
'Digital terrain modelling: a review of hydrological, geomorphological, and biological applications'
Hydrological Processes, Vol.5, No.1

Parameters

Name	Type	Identifier	Description	Constraints
Input				
Slope	Grid (input)	SLOPE		
Catchment Area	Grid (input)	AREA		
Transmissivity (*)	Grid (optional input)	TRANS		
Output				
Topographic Wetness Index	Grid (output)	TWI		
Options				
Area Conversion	Choice	CONV		Available Choices: [0] no conversion (areas already given as specific catchment area) [1] 1 / cell size (pseudo specific catchment area)
Method (TWI)	Choice	METHOD		Available Choices: [0] Standard [1] TOPMODEL


Topographic Wetness Index

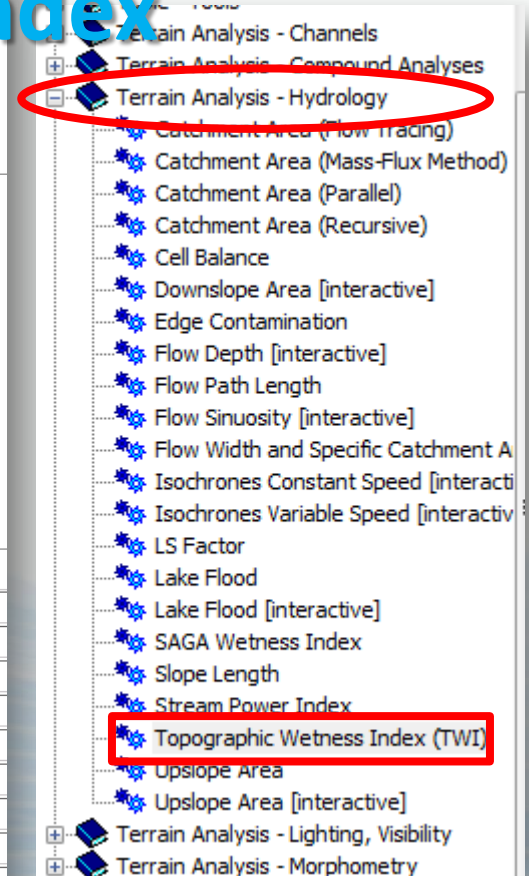


SAGA GIS

Common borders. Common solutions.


Υπολογισμός του TWI

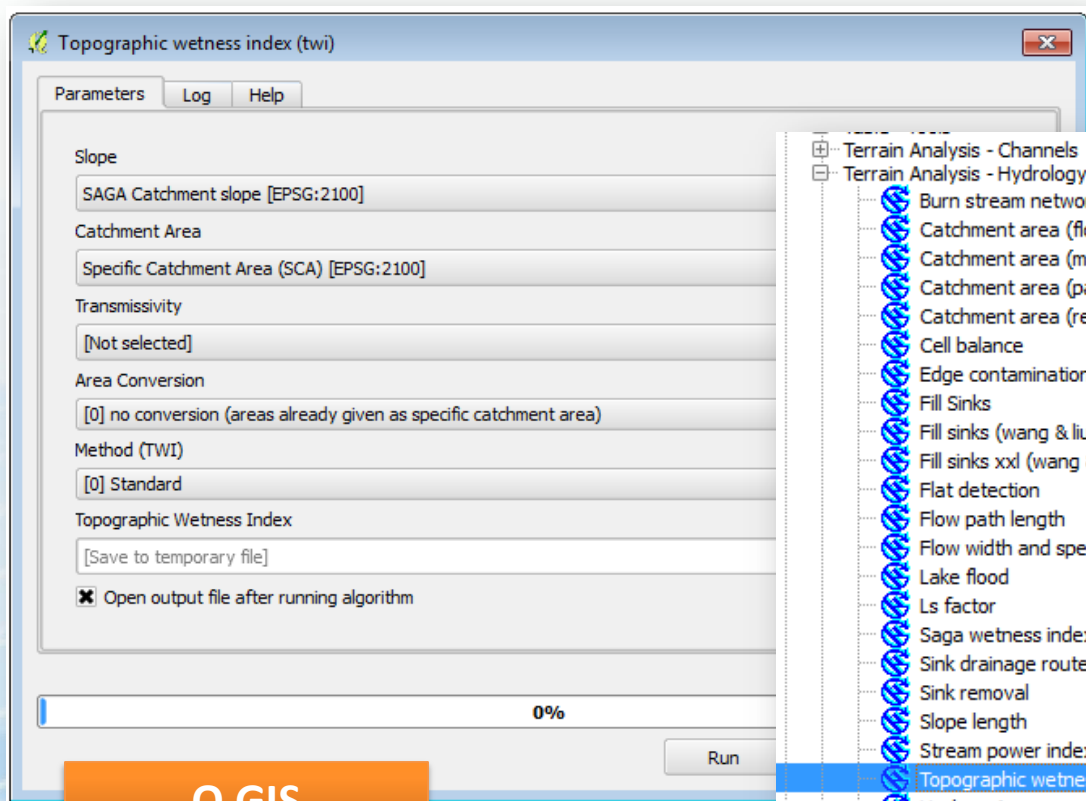


Q GIS

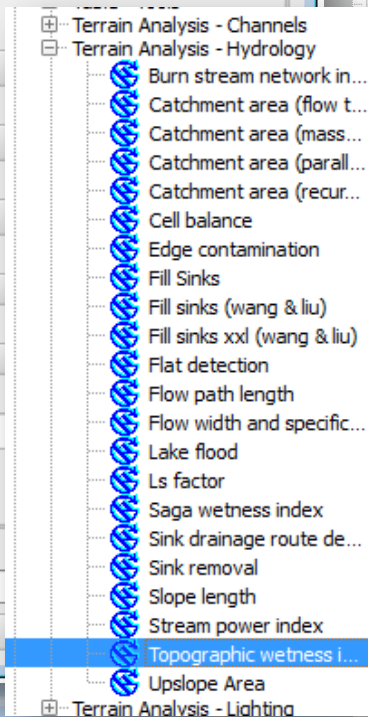

Menu/Location

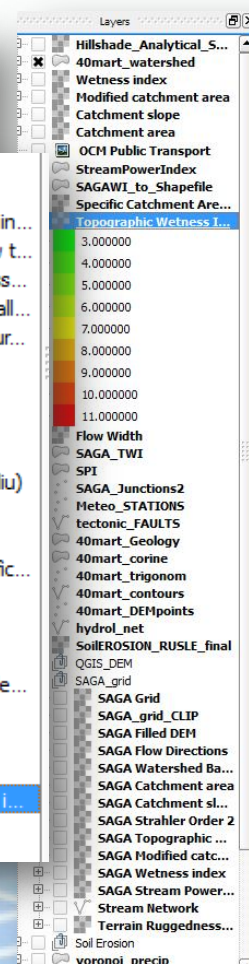

TWI

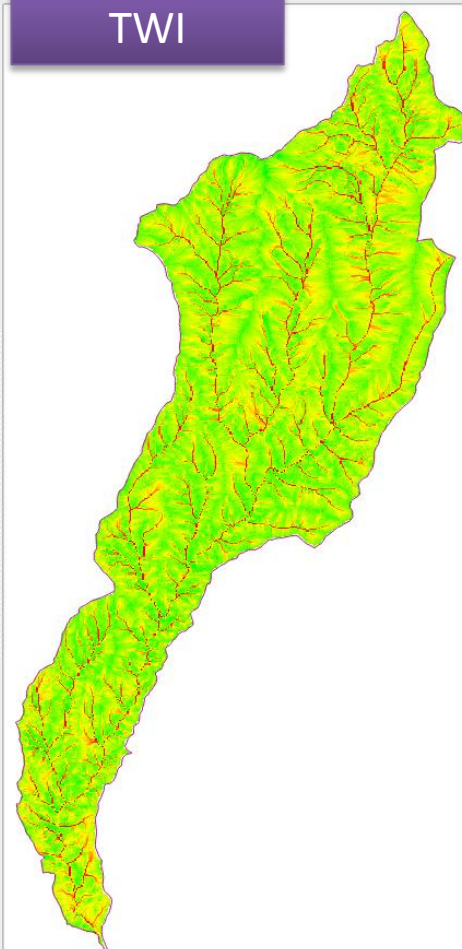




Project funded by the
EUROPEAN UNION




Common borders. Common solutions. **TWI vs SAGA WI**

Differences due
to the
“Catchment
Area” parameter

SAGA (T)WI

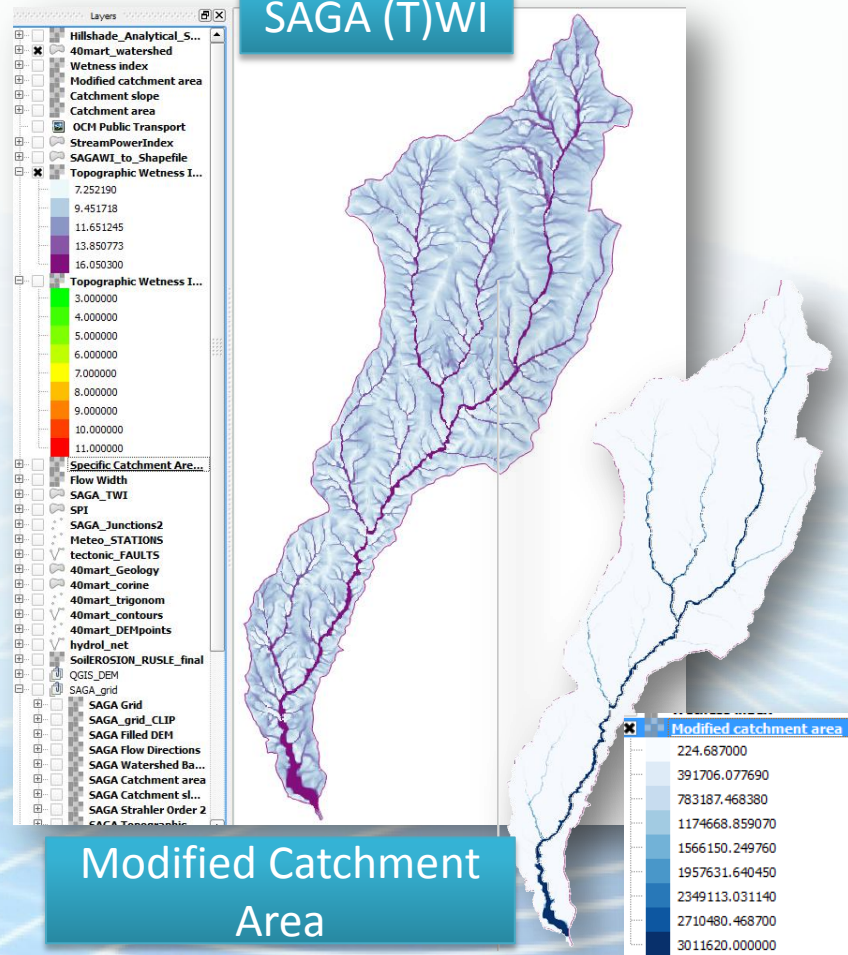

TWI

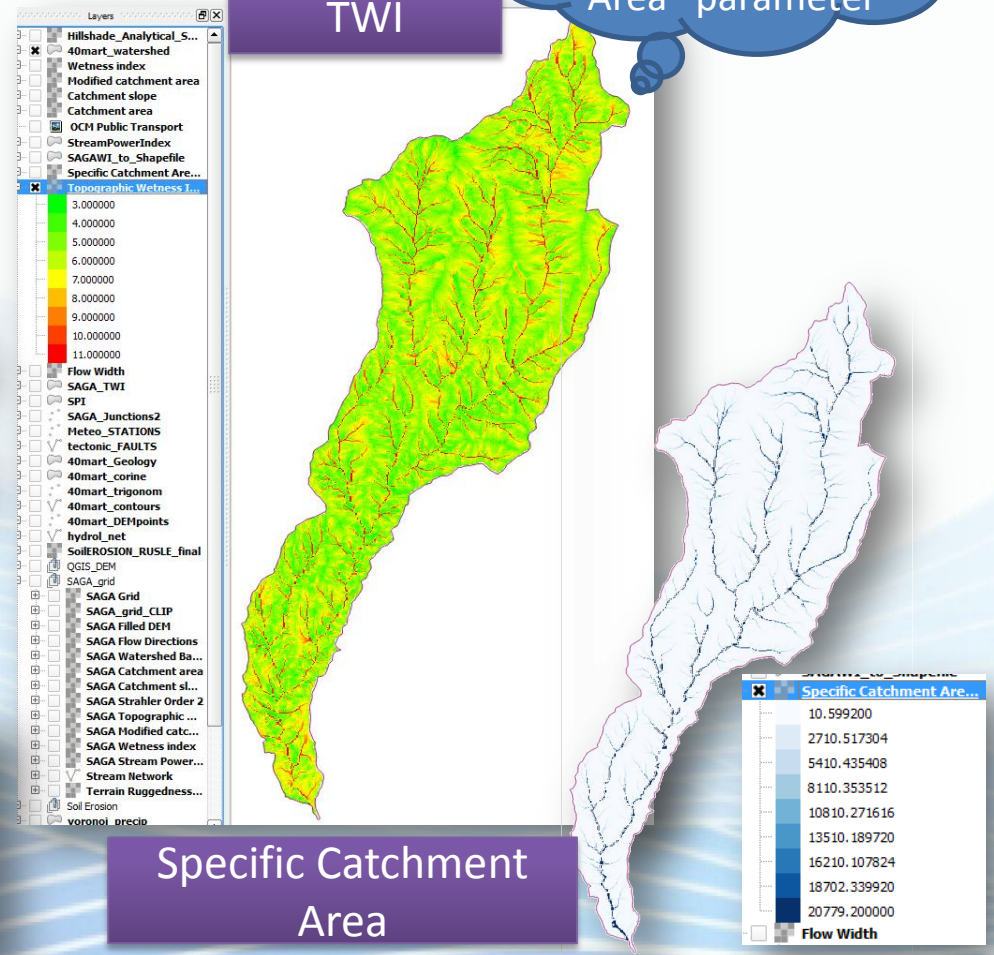

Common borders. Common solutions.

TWI vs SAGA WI

SAGA (T)WI



TWI



This is what has actually happen in Serres,
eight years ago

Common borders. Common solutions.

RUSLE – LS factor

Workspace

- Reports - HTML
- Reports - PDF
- Shapes - Grid
- Shapes - Lines
- Shapes - Point Clouds
- Shapes - Point Clouds Viewer
- Shapes - Points
- Shapes - Polygons
- Shapes - Tools
- Shapes - Transects
- Simulation - Cellular Automata
- Simulation - Fire Spreading Analysis
- Simulation - Hydrology
- Simulation - Hydrology: IHACRES
- Simulation - Modelling the Human Impact
- TIN - Tools
- TIN - Visualisation
- Table - Calculus
- Table - Tools
- Terrain Analysis - Channels
- Terrain Analysis - Compound Analyses
- Terrain Analysis - Hydrology
 - Catchment Area (Flow Tracing)
 - Catchment Area (Mass-Flux Method)
 - Catchment Area (Parallel)
 - Catchment Area (Recursive)
 - Cell Balance
 - Downslope Area [Interactive]
 - Edge Contamination
 - Flow Depth [Interactive]
 - Flow Path Length
 - Flow Sinuosity [Interactive]
 - Flow Width and Specific Catchment A
 - Isochrones Constant Speed [Interacti
 - Isochrones Variable Speed [Interactiv
 - LS Factor**
 - Lake Flood
 - Lake Flood [Interactive]
 - SAGA Wetness Index
 - Slope Length
 - Stream Power Index
 - Topographic Wetness Index (TWI)
 - Upslope Area
 - Upslope Area [Interactive]
- Terrain Analysis - Lighting, Visibility
- Terrain Analysis - Morphometry
- Terrain Analysis - Preprocessing
- Terrain Analysis - Profiles

LS Factor

Description
Calculation of slope length (LS) factor as used by the Universal Soil Loss Equation (USLE), based on slope and specific catchment area (SCA, as substitute for slope length).
References:

Boehner, J., Selige, T. (2006):
Spatial Prediction of Soil Attributes Using Terrain Analysis and Climate Regionalisation'
In: Boehner, J., McCloy, K.R., Strobl, J.: 'SAGA – Analysis and Modelling Applications', Goettinger Geographische Abhandlungen, Vol.115, p.13-27

Desmet & Govers (1996):
'A GIS Procedure for Automatically Calculating the USLE LS Factor on Topographically Complex Landscape Units'
Journal of Soil and Water Conservation, 51(5):427-433

Kinnell, P.I.A. (2005):
'Alternative Approaches for Determining the USLE-M Slope Length Factor for Grid Cells.'
<http://soil.scijournals.org/cgi/content/full/69/3/674>

Moore, I.D., Grayson, R.B., Ladson, A.R. (1991):
'Digital terrain modelling: a review of hydrological, geomorphological, and biological applications'
Hydrological Processes, Vol.5, No.1

Wischmeier, W.H., Smith, D.D. (1978):
'Predicting rainfall erosion losses – A guide to conservation planning'
Agriculture Handbook No. 537: US Department of Agriculture, Washington DC.

Parameters

Name	Type	Identifier	Description	Constraints
Input				
Slope	Grid (input)	SLOPE		
Catchment Area	Grid (input)	AREA		
Output				
LS Factor	Grid (output)	LS		
Options				
Area to Length Conversion	Choice	CONV	Derivation of slope lengths from catchment areas. These are rough approximations! Applies not to Desmet & Govers' method.	Available Choices: [0] no conversion (areas already given as specific catchment area) [1] 1 / cell size (specific catchment area) [2] square root (catchment length)
Method (I S)	Choice	METHOD		Available Choices:

SAGA GIS

Common borders. Common solutions.

RUSLE – LS factor

Workspace

- Reports - HTML
- Reports - PDF
- Shapes - Grid
- Shapes - Lines
- Shapes - Point Clouds
- Shapes - Point Clouds Viewer
- Shapes - Points
- Shapes - Polygons
- Shapes - Tools
- Shapes - Transects
- Simulation - Cellular Automata
- Simulation - Fire Spreading Analysis
- Simulation - Hydrology
- Simulation - Hydrology: IHACRES
- Simulation - Modelling the Human Impact
- TIN - Tools
- TIN - Visualisation
- Table - Calculus
- Table - Tools
- Terrain Analysis - Channels
- Terrain Analysis - Compound Analyses
- Terrain Analysis - Hydrology
 - Catchment Area (Flow Tracing)
 - Catchment Area (Mass-Flux Method)
 - Catchment Area (Parallel)
 - Catchment Area (Recursive)
 - Cell Balance
 - Downslope Area [Interactive]
 - Edge Contamination
 - Flow Depth [Interactive]
 - Flow Path Length
 - Flow Sinuosity [Interactive]
 - Flow Width and Specific Catchment A
 - Isochrones Constant Speed [Interacti
 - Isochrones Variable Speed [Interactiv
 - LS Factor**
 - Lake Flood
 - Lake Flood [Interactive]
 - SAGA Wetness Index
 - Slope Length
 - Stream Power Index
 - Topographic Wetness Index (TWI)
 - Upslope Area
 - Upslope Area [Interactive]
- Terrain Analysis - Lighting, Visibility
- Terrain Analysis - Morphometry
- Terrain Analysis - Preprocessing
- Terrain Analysis - Profiles

LS Factor

Description
Calculation of slope length (LS) factor as used by the Universal Soil Loss Equation (USLE), based on slope and specific catchment area (SCA, as substitute for slope length).
References:

Boehner, J., Selige, T. (2006):
Spatial Prediction of Soil Attributes Using Terrain Analysis and Climate Regionalisation'
In: Boehner, J., McCloy, K.R., Strobl, J.: 'SAGA – Analysis and Modelling Applications', Goettinger Geographische Abhandlungen, Vol.115, p.13-27

Desmet & Govers (1996):
'A GIS Procedure for Automatically Calculating the USLE LS Factor on Topographically Complex Landscape Units'
Journal of Soil and Water Conservation, 51(5):427-433

Kinnell, P.I.A. (2005):
'Alternative Approaches for Determining the USLE-M Slope Length Factor for Grid Cells.'
<http://soil.scijournals.org/cgi/content/full/69/3/674>

Moore, I.D., Grayson, R.B., Ladson, A.R. (1991):
'Digital terrain modelling: a review of hydrological, geomorphological, and biological applications'
Hydrological Processes, Vol.5, No.1

Wischmeier, W.H., Smith, D.D. (1978):
'Predicting rainfall erosion losses – A guide to conservation planning'
Agriculture Handbook No. 537: US Department of Agriculture, Washington DC.

Parameters

Name	Type	Identifier	Description	Constraints
Input				
Slope	Grid (input)	SLOPE		
Catchment Area	Grid (input)	AREA		
Output				
LS Factor	Grid (output)	LS		
Options				
Area to Length Conversion	Choice	CONV	Derivation of slope lengths from catchment areas. These are rough approximations! Applies not to Desmet & Govers' method.	Available Choices: [0] no conversion (areas already given as specific catchment area) [1] 1 / cell size (specific catchment area) [2] square root (catchment length)
Method (I S)	Choice	METHOD		Available Choices:

SAGA GIS



Project funded by the
EUROPEAN UNION



Common borders. Common solutions.

RUSLE – LS factor

- Table - Tools
- Terrain Analysis - Channels
- Terrain Analysis - Hydrology
 - Burn stream network in...
 - Catchment area (flow t...
 - Catchment area (mass...
 - Catchment area (parall...
 - Catchment area (recur...
 - Cell balance
 - Edge contamination
 - Fill Sinks
 - Fill sinks (wang & liu)
 - Fill sinks xxi (wang & liu)
 - Flat detection
 - Flow path length
 - Flow width and specific...
 - Lake flood
 - LS factor
 - Saga wetness index
 - Sink drainage route de...
 - Sink removal
 - Slope length
 - Stream power index
 - Topographic wetness i...
 - Upslope Area
- Terrain Analysis - Lighting
- Terrain Analysis - Morphometry
- Terrain Analysis - Profiles

LS factor

Parameters Log Help

Slope
SAGA_Slope [EPSG:2100]

Catchment Area
Specific Catchment Area (SCA) [EPSG:2100]

Area to Length Conversion
[0] no conversion (areas already given as specific catchment area)

Method (LS)
[0] Moore et al. 1991

Rill/Interrill Erosivity
0.000000


Stability
[0] stable

LS Factor
[Save to temporary file]

☒ Open output file after running algorithm

0%

Run Close Cancel

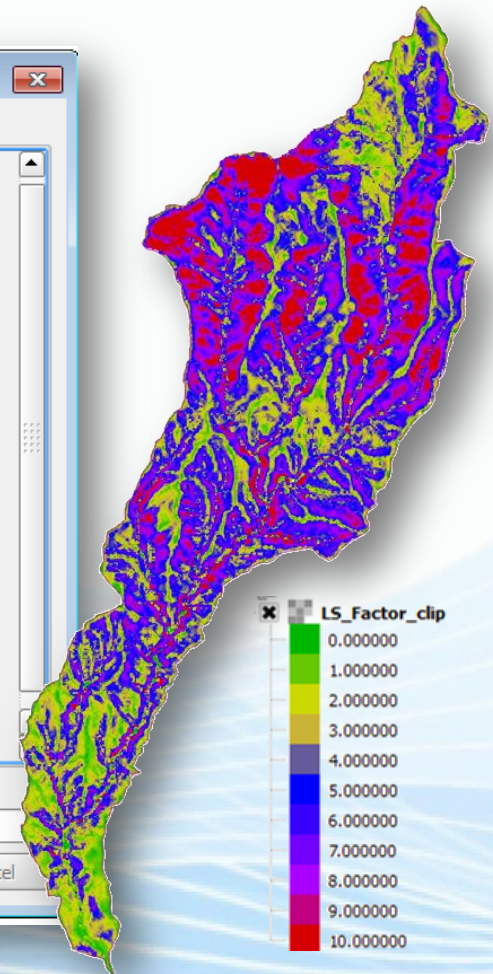


QGIS

Common borders. Common solutions.

RUSLE – Soil Erosion Potential...

QGIS

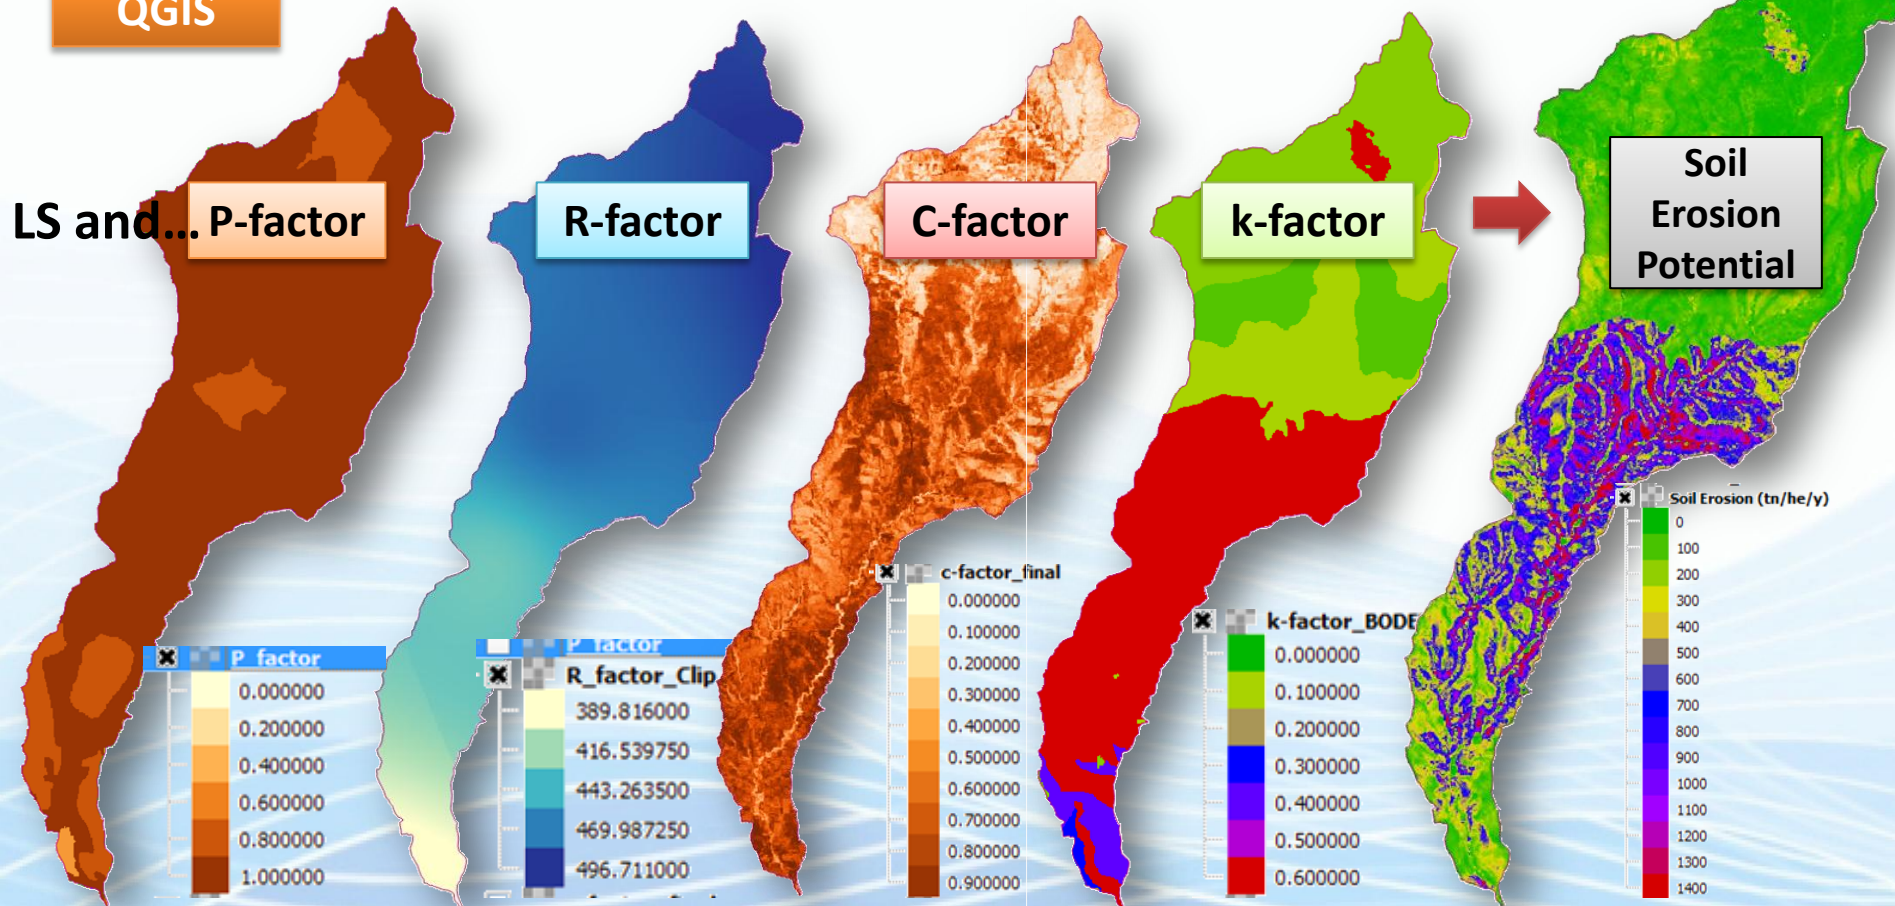

...to support decisions regarding RETENTION measures




Project funded by the
EUROPEAN UNION



Common borders. Common solutions.

RUSLE – Soil Erosion Potential...

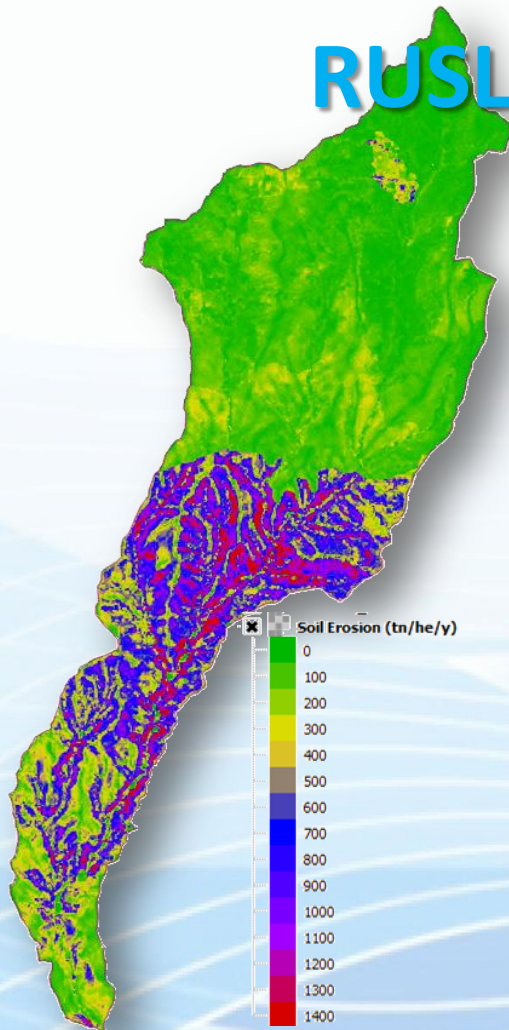


...μπορεί να χρησιμοποιηθεί για την
επιλογή των **βέλτιστων θέσεων**
κατασκευής έργων συγκράτησης των
στερεών προκειμένου να αποτραπεί η
μεταφορά και απόθεσή τους κατάντη.

Soil Erosion Potential


Common borders. Common solutions.

From Regional to Local Scale

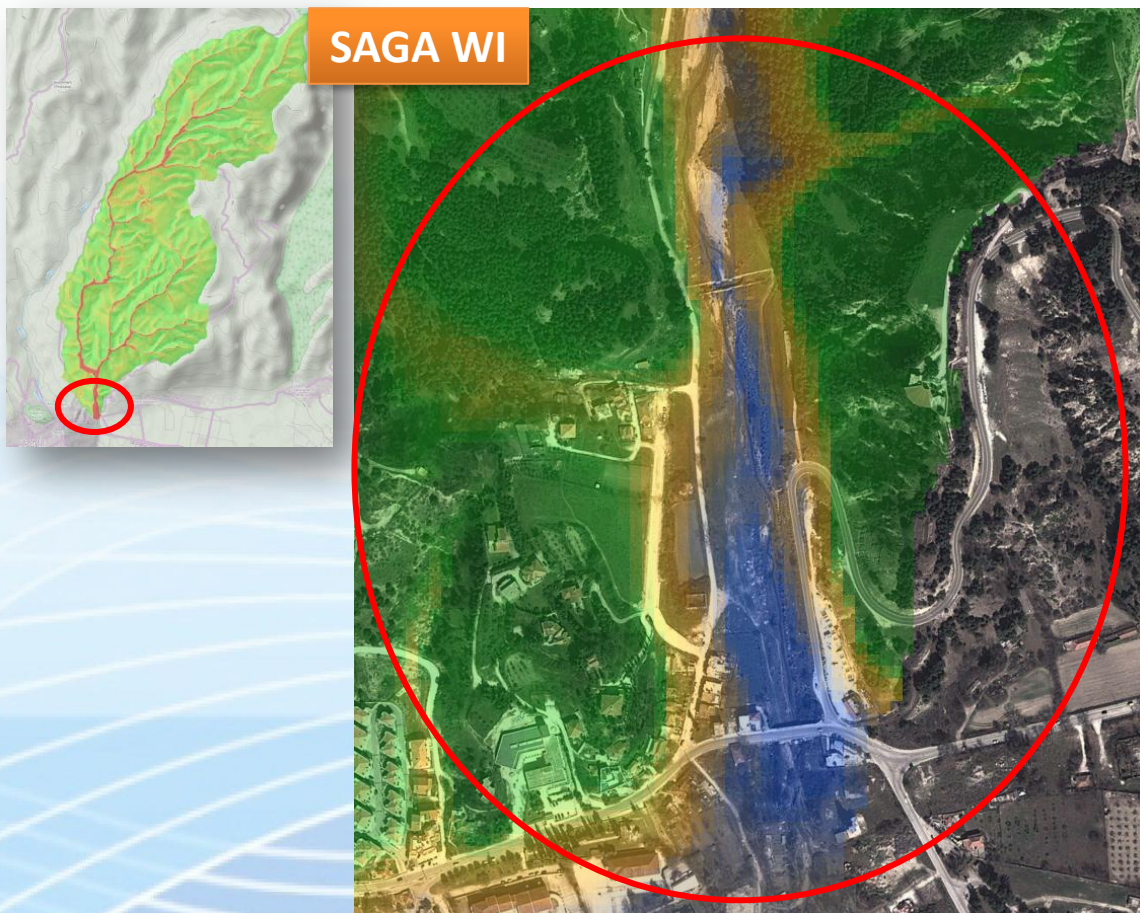

Common borders. Common solutions.

Detailed Topographic Data

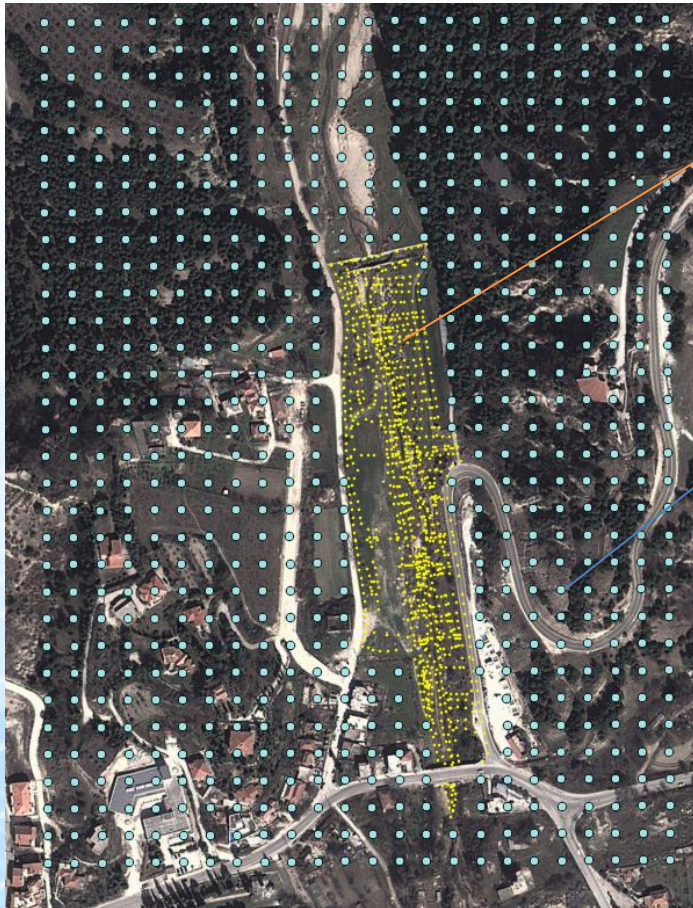


Measured in situ with GPS
(differential GPS & RTK)

Lattice /25m
or Produced by topographic maps
1:5.000


Common borders. Common solutions.

DTM & Products – additional parameters

DTM

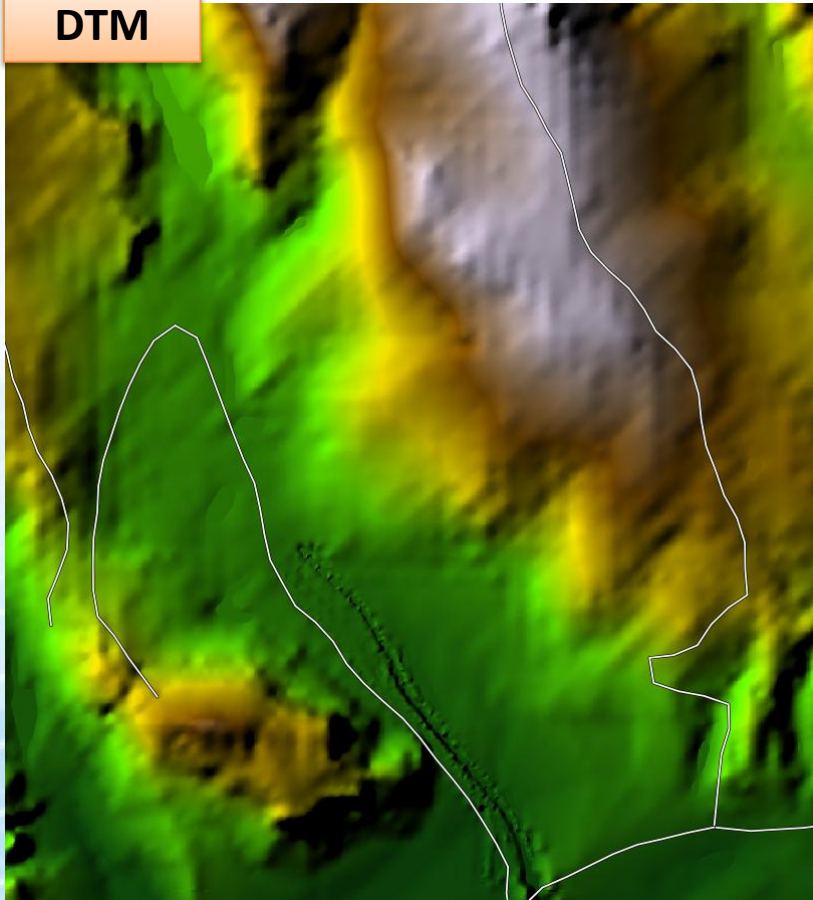

Hillshade

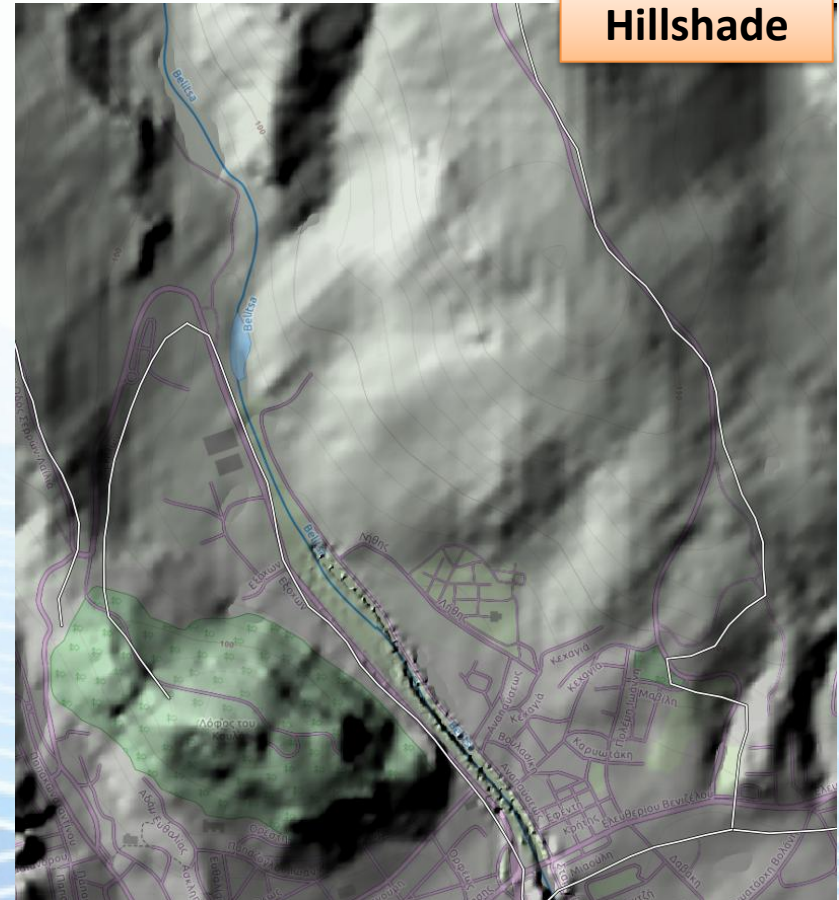

Common borders. Common solutions.

Αυτοματοποιημένη χάραξη διατομών

Requirements

1. DTM
2. STREAM (digitized towards downstream)

QGIS

DTM

Stream

Distance between profiles

Profile Length

Points per Profile

File Name of Cross Sections

 Cross profiles

Promise from p...


Profiles from I
Vigra

- Scripts [14 geoalgorith...
- Tools for LiDAR data [


Common borders. Common solutions.

Στοιχεία των διατομών

Menu

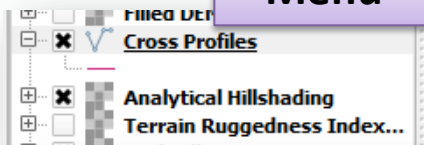

Map

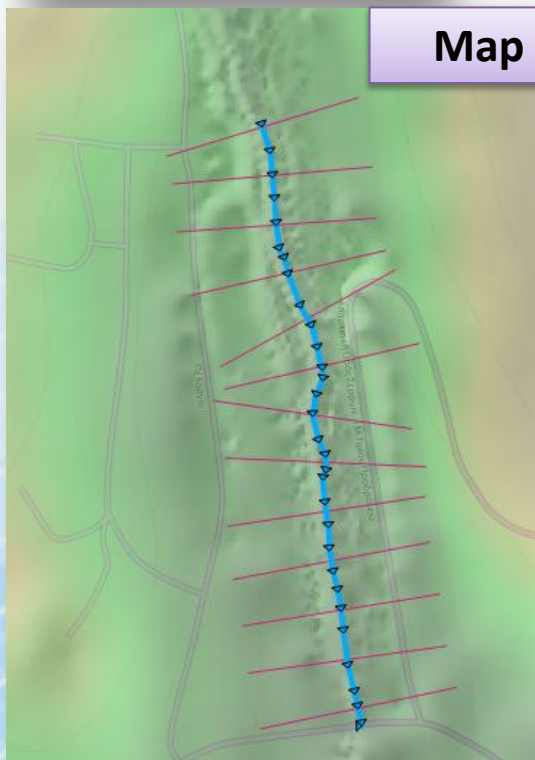

Attribute Table (elevation per point)

table - Cross Profiles :: Features total: 13, filtered: 13, selected: 0



	LINE	PART	X000	X001	X002	X003	X004	X005	X006	
1	0	0	81.31216345	81.01318737	80.77740383	81.94197267	77.05189802	76.69844410	77.05443992	76
2	0	0	80.36807859	80.53721828	81.22395998	81.06987561	77.57384116	76.87042625	76.97116680	76
3	0	0	80.09556574	79.41675102	77.92777418	79.48167429	75.89942276	74.94321184	76.79975725	7
4	0	0	76.66154973	77.76394551	79.05340228	78.59009320	76.49035852	74.47164445	76.77079476	76
5	0	0	77.80336311	77.37470877	78.16067886	75.46817292	76.80625927	74.02599430	80.54654084	76
6	0	0	77.34242100	76.73347127	76.66835280	74.92638915	74.61941307	74.38077634	80.26241746	7
7	0	0	77.80927850	76.68323782	76.14639791	76.07710368	75.01390560	74.42291312	75.13211237	76
8	0	0	77.23749681	75.90792673	75.72605607	76.68124969	73.87090896	74.31871114	75.77795388	76
9	0	0	76.55099047	76.18423905	75.55665144	75.24518147	74.32255786	73.49378710	74.02076655	7
10	0	0	73.85383254	73.31347786	73.62798108	74.90021990	73.46479715	72.95154047	73.71524203	76
11	0	0	74.68907417	74.15059204	74.05358555	74.13774337	73.45784859	73.19855870	73.83427092	76
12	0	0	75.14858686	74.18871763	72.67972298	72.79477218	72.78129420	72.28222858	74.62984865	76
13	0	0	74.83953867	74.12967483	72.99763645	72.37374664	72.17354573	72.12532994	75.62717616	76

Features

Common borders. Common solutions.

Cross Sections to ...HEC-RAS geometry


Q-RAS *plugin*

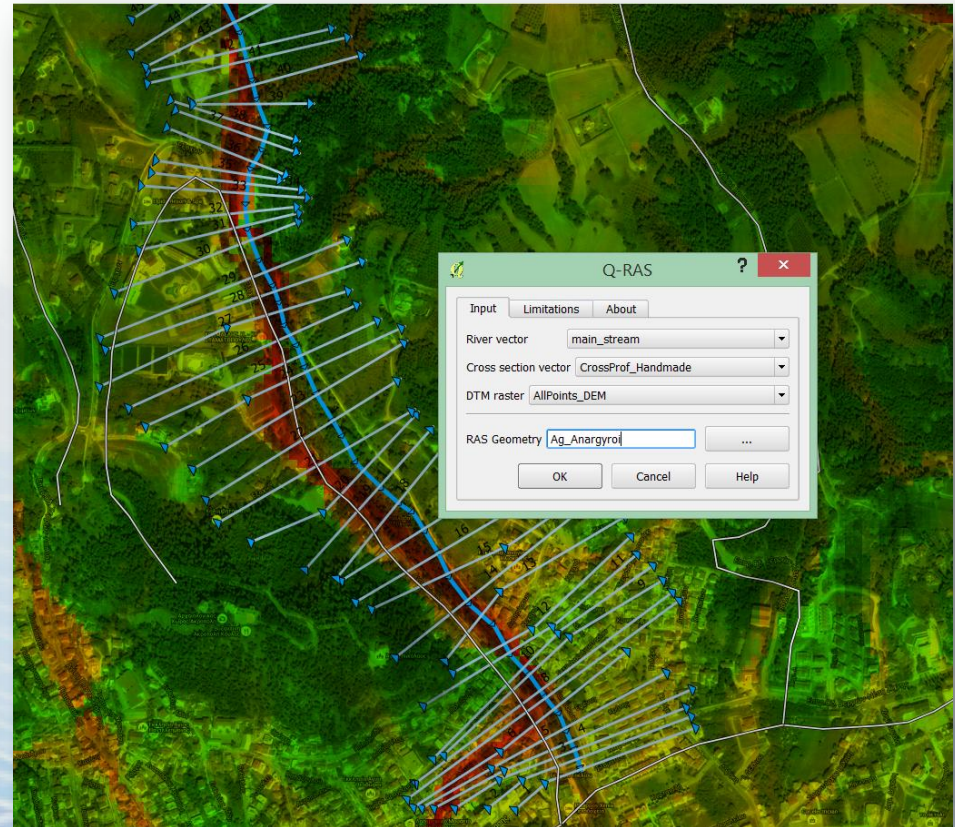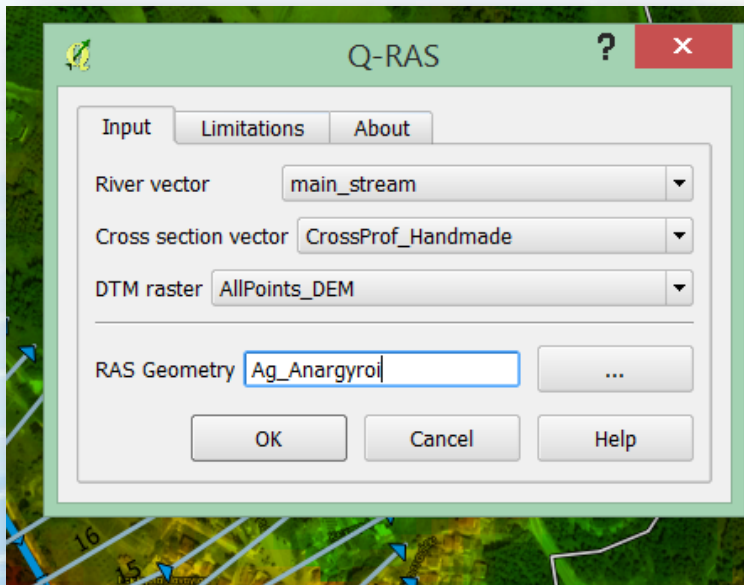

Με τη χρησιμοποίηση του Q-RAS plugin, απλά εισάγονται οι παραμετροι και...η γεωμετρία είναι έτοιμη για εισαγωγή στο HEC-RAS

Common borders. Common solutions.

Απλά ...HEC-RAS geometry / Import Geometry Data

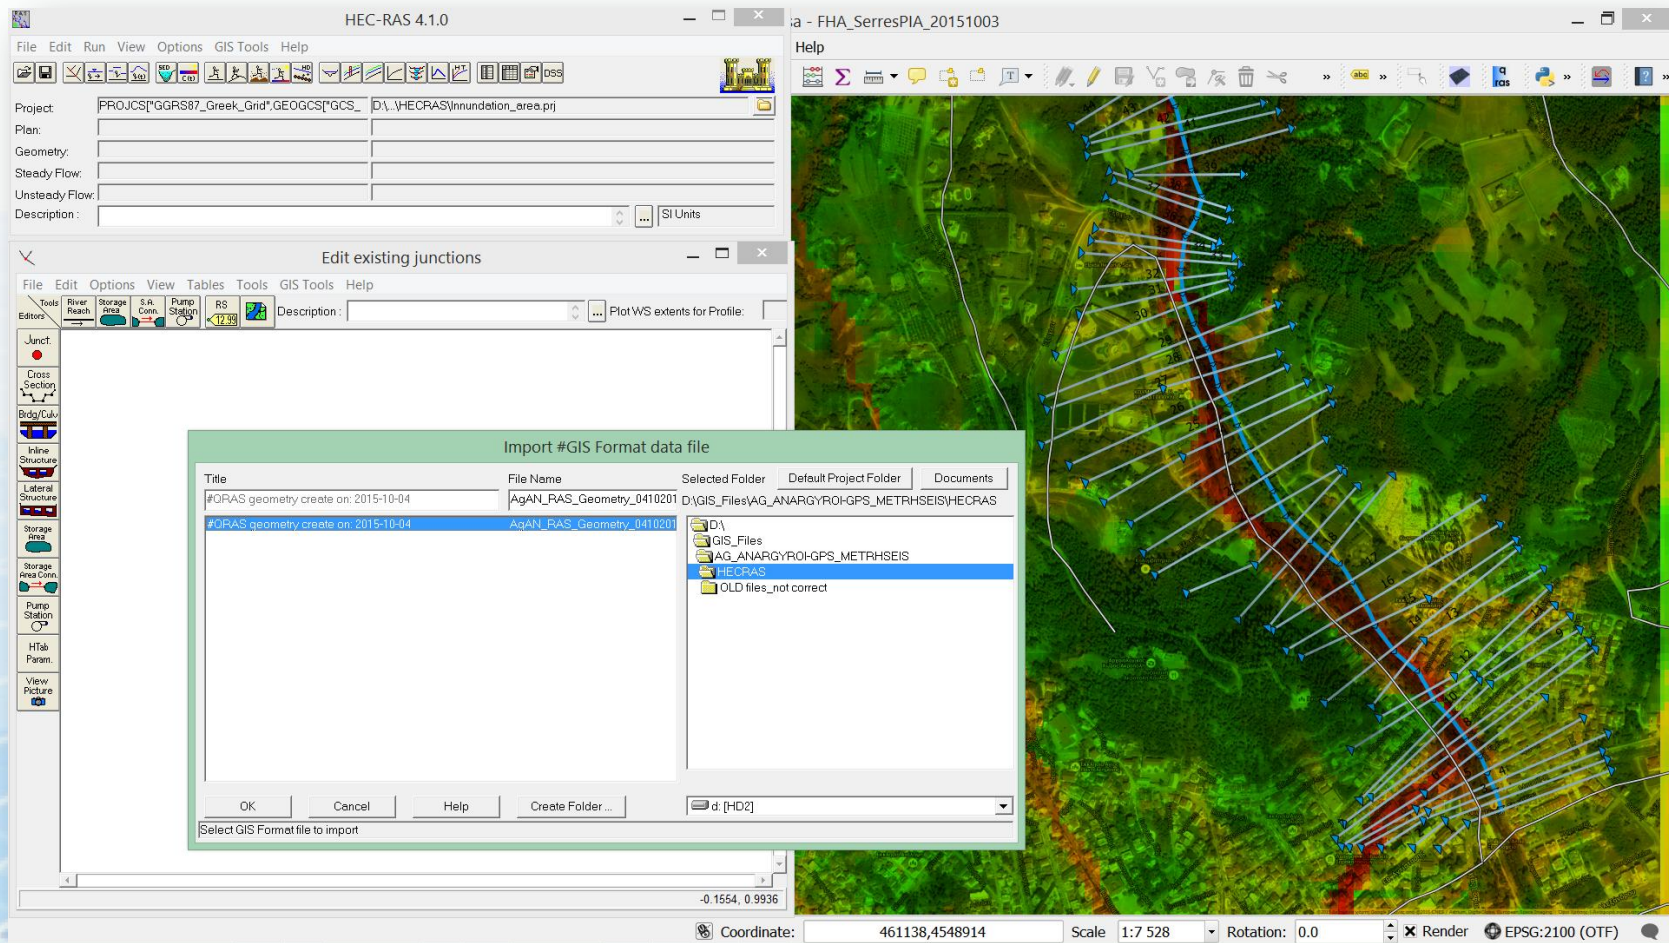

HEC-RAS 4.1.0

File Edit Run View Options GIS Tools Help

Project: F:\PROJECTS\GGRS87_Greek_Grid\GEOGCS\GCS_ D:\HECRAS\Inundation_area.prj

Plan:

Geometry:

Steady Flow:

Unsteady Flow:

Description: SI Units

Edit existing junctions

File Edit Options View Tables Tools GIS Tools Help

Tools River Storage S.A. Pump RS Plot WS extents for Profile:

Junct. Cross Section Bridge/Culv. Inline Structure Lateral Structure Storage Area Storage Area Conn. Pump Station HTab Param. View Picture

Import #GIS Format data file

Title	File Name	Selected Folder	Default Project Folder	Documents
#ORAS geometry create on: 2015-10-04	AgAN_RAS_Geometry_0410201	D:\GIS_Files\AG_ANARGYROI-GPS_METRHSEIS\HECRAS		
#ORAS geometry create on: 2015-10-04	AgAN_RAS_Geometry_0410201			


OK Cancel Help Create Folder ...

Select GIS Format file to import

Coordinate: 461138,4548914 Scale: 1:7 528 Rotation: 0.0 Render EPSG:2100 (OTF)

Common borders. Common solutions.

....και... έτοιμοι για επεξεργασία με το HEC-RAS

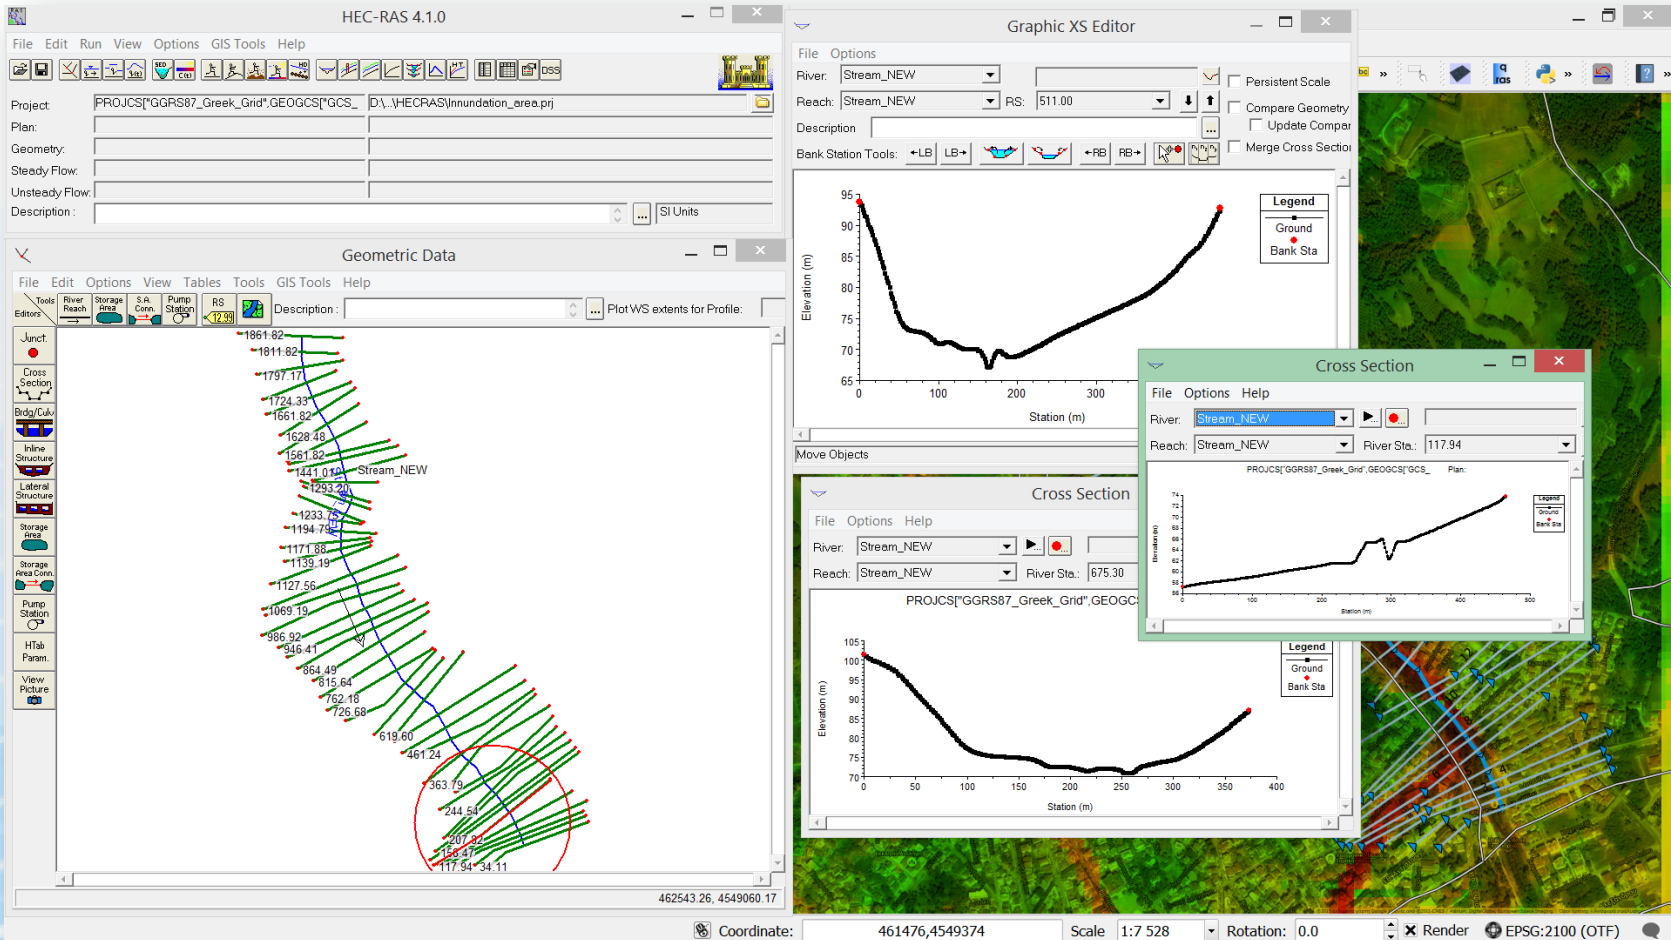

Common borders. Common solutions.

SciNetNatHaz Project Progress Meeting - 23-26 Oct 2014, Burgas, Bulgaria

ΣΑΣ ΕΥΧΑΡΙΣΤΟΥΜΕ ΓΙΑ ΤΗ ΣΥΜΜΕΤΟΧΗ ΚΑΙ ΤΗΝ ΥΠΟΣΤΗΡΙΞΗ!

SciNet NatHaz
Prevention

Black Sea
CROSS BORDER
COOPERATION

Konstantinos Papatheodorou
Helena Tzanou

TEI of Kentriki Makedonia, LP/ENPI

Beneficiary

Information: K. Papatheodorou, Project Coordinator, TEI of Central Macedonia, Hellas, www.scinetnathaz.net